

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/008491 A2

- (51) International Patent Classification⁷: **H01L**
- (21) International Application Number:
PCT/US2003/021575
- (22) International Filing Date: 10 July 2003 (10.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/396,536 15 July 2002 (15.07.2002) US
60/428,526 22 November 2002 (22.11.2002) US
- (71) Applicant (for all designated States except US): **ASML
US, INC.** [US/US]; 440 Kings Village Road, Scotts Valley,
CA 95066 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DUBOIS, Dale, R.**


[US/US]; 14285 Mulberry Drive, Los Gatos, CA 95032 (US). **NAM, Jamie, H.** [US/US]; 104 B San Augustine Way, Scotts Valley, CA 95066 (US). **WILDMAN, Craig** [US/US]; 1729 Karameos Drive, Sunnyvale, CA 94087 (US). **QIU, Taiquing** [US/US]; 135 Riveria Drive, Apt. 328, Los Gatos, CA 95032 (US). **KOWALSKI, Jeffrey, M.** [US/US]; 174 Tibron Court, Aptos, CA 95003 (US).

(74) Agents: **SWIATEK, Maria, S.** et al.; **DORSEY & WHITNEY LLP**, 4 Embarcadero Center, Suite 3400, San Francisco, CA 94111 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: THERMAL PROCESSING SYSTEM AND CONFIGURABLE VERTICAL CHAMBER

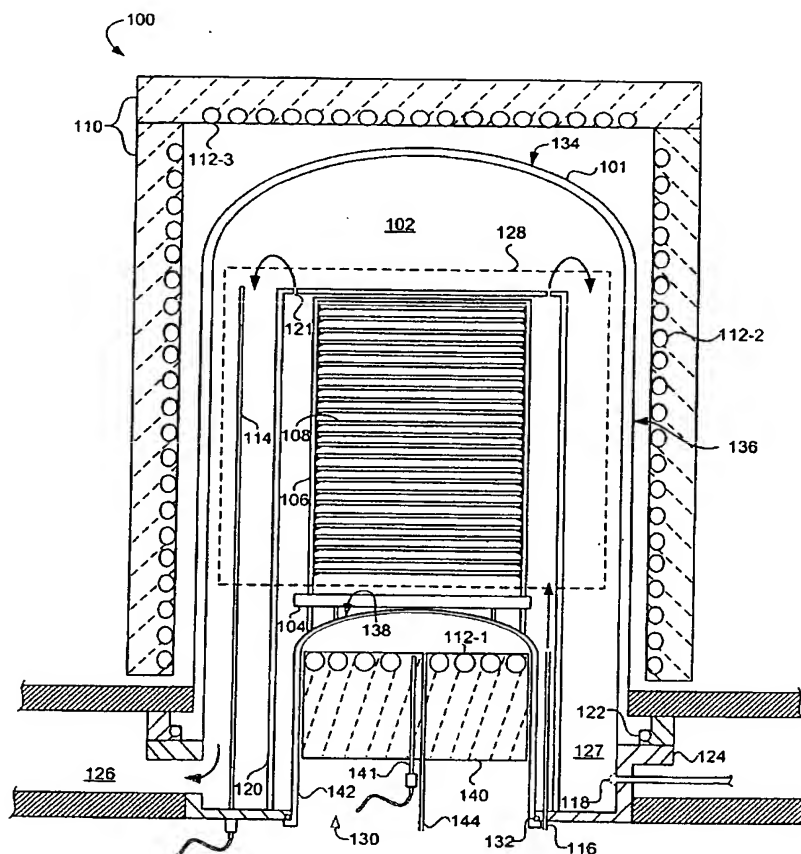

(57) Abstract: An apparatus (100) and method are provided for thermally processing substrates (108) held in a carrier (106). The apparatus (100) includes a vessel (101) having a top (134), side (136) and bottom (138), and a heat source (110) with heating elements (112-1, 112-2, 112-3) proximal thereto. The vessel (101) is sized to enclose a volume substantially no larger than necessary to accommodate the carrier (106), and to provide an isothermal process zone (128) extending throughout. In one embodiment, the bottom wall (138) includes a movable pedestal (140) with a bottom heating element therein (112-1), and the pedestal can be lowered and raised to insert the carrier (106) into the vessel (101). The apparatus (100) can include a movable shield (146) that is inserted between the pedestal (140) and the carrier (106) to shield the substrates (108) from the heating element (112-1) and to maintain pedestal temperature. A magnetically coupled repositioning system (162) repositions the carrier (106) during processing of the substrates (108) without use of a movable feedthrough into the volume enclosed by the vessel (101), and without moving the bottom heating element (112-1) in the pedestal (140).